



# SOLARDECK PRO

## BALCONY SOLAR SYSTEM

Ultralight | Crack-free | Easy-to-install | Aesthetics

Powered by TSR-Armor™ Technology



### Low-weight

Areal Weight: 2.9kg/m<sup>2</sup>

Flexible Mounting Options



### Thin

Module Thickness: 1.8 mm

Frame Thickness: 6 mm



### High-strength

No Micro-Cracks Under Hail Impact

High Mechanical Load



### Easy-to-install

Flexible Installation

Plug-and-play with Microinverters.





### Aesthetics

Standard Balcony Setup  
Garden & Terrace Setup  
Portable Power Setup

# Solardeck Pro

## Technical Data Sheet

Module Type:	ZKFN-YT233W
Pmax	233W
Vmp	37.74V
Imp	6.19A
Voc	44.21V
Isc	6.48A
Dimension	1161*1033*6mm (junction box not included)
Weight	4kg/m <sup>2</sup>
Output Line	4mm <sup>2</sup> , wire length 400mm (customizable)
Connector	MC4 compatible
Junction-box	IP68-rated junction box
Mechanical Load	Front 2400Pa, back 2400Pa
Protection Rating	Class II
Temperature-coefficient of PMPP	-0.29%/°C
Temperature-coefficient of Voc	-0.26%/°C
Temperature-coefficient of Isc	+0.045%/°C

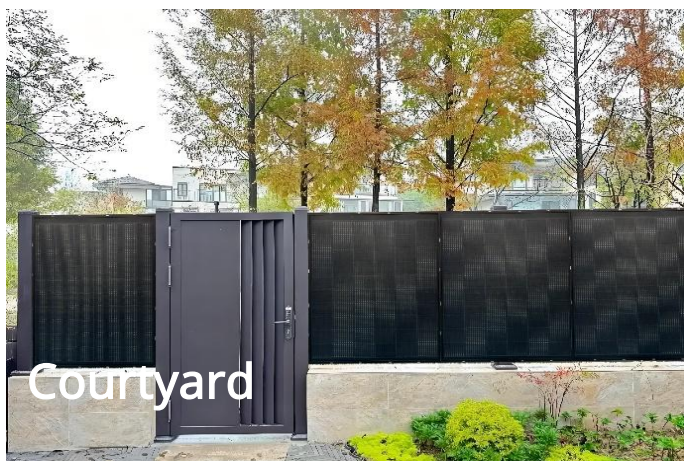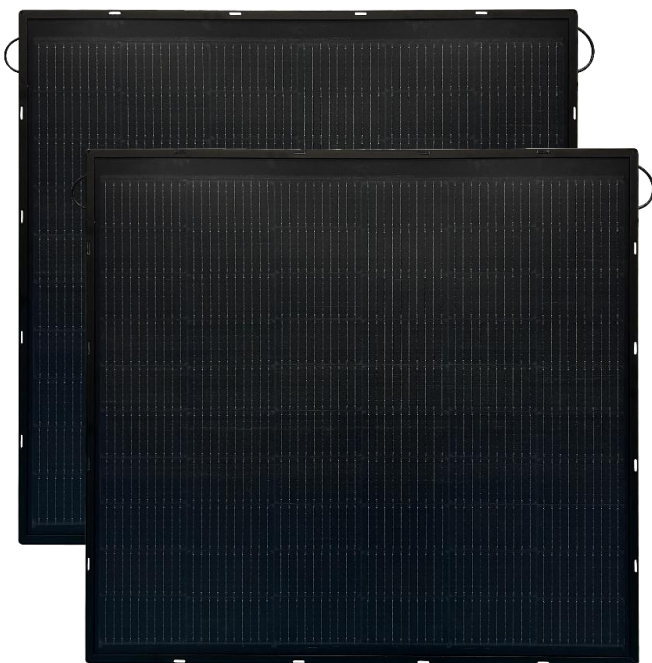

Shandong ZKFN Solar Technology Co., Ltd.

Tel.: +86 400 6768 100 Web.: [www.zkfn.com](http://www.zkfn.com)

Add.: Factory 1 of XinShenglin, LvHaiHui Intelligent Manufacturing Industrial Park,  
Jining Economic Development Zone, Jining, Shandong, China

\*NOTE: ZKFN Solar reserves right to update the specification without notice. Please always obtain the most recent version of the datasheet.

202605\_V9.2.1\_EN