

# SolarPegaFL

TOPCON Light-weight Module 500-510W

Light-weight | Anti-dust | Walkable | Crack-free

Powered by TSR-Armor™ Technology

Quality Assurance



## Light-weight

Weight only 5.9kg/m<sup>2</sup>, about 50% of traditional panels



## Walkable

Panels can be stepped on, without cell micro-cracks



## Anti-dust

Panel surface has the same height of frame, avoiding dust accumulation



## Easy-to-install

Quick-clamp mounting, no rails required

**510W**

Max-power

**22.9%**

Efficiency

**0-+5W**


Power-tolerance

**≤1%**

First-year Degradation

**≤0.4%**

Annual Degradation from Year 2-30

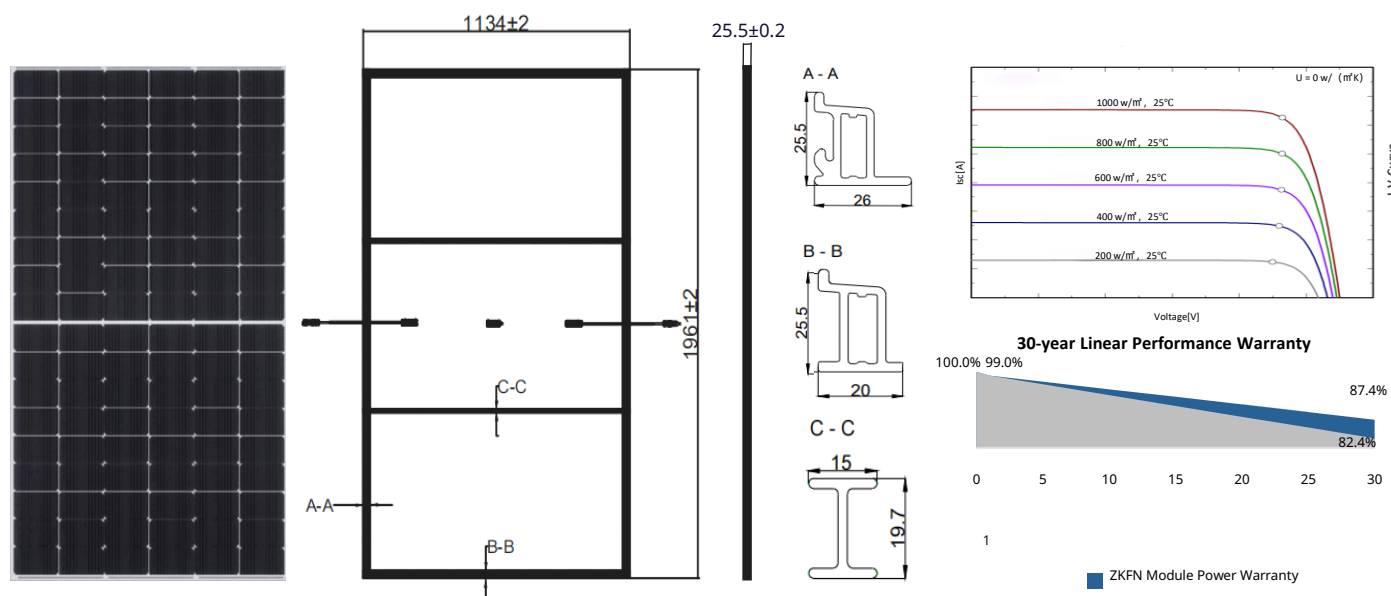

### Electrical performance parameters (STC:AM1.5 1000W/m<sup>2</sup> 25°C test error ±3%;NMOT:800W/m<sup>2</sup> 20°C 1m/s) Power Tolerance:0-+5W

Module Type	ZKFN-G2-122B 500		ZKFN-G2-122B 505		ZKFN-G2-122B 510	
	STC	NMOT	STC	NMOT	STC	NMOT
Pmax [W]	500	385	505	388.8	510	392.7
Vmp [V]	33.76	27.00	33.85	27.08	33.91	27.13
Imp [A]	14.83	13.94	14.94	14.04	15.06	14.16
Voc [V]	39.72	32.17	39.87	32.29	40.03	32.42
Isc [A]	15.36	14.59	15.40	14.63	15.45	14.68

### Mechanical parameters

Cell Type	Topcon cell 182.3*105mm
Dimension	1961*1134*25.5mm
Glass	Single glass,1.1mm reinforced glass
Frame	High-strength glass-fiber resin composite
Weight	13.0kg
Output Line	4mm <sup>2</sup> ,wire length 400mm (customizable)
Connector	Staubli Electrical Connectors AG – MC4 EVO2 Series
Junction-box	3 IP68-rated junction box

### Temperature coefficient

Temperature-coefficient of PMPP	[%/°C]	-0.33
Temperature-coefficient of Voc	[%/°C]	-0.27
Temperature-coefficient of Isc	[%/°C]	+0.045
NOCT	[°C]	45±2

### Application parameters

Max. System Voltage	DC 1500V
Power Tolerance	0-+5W
Operating Temperature Range	-40°C-+85°C
Max. Series Fuse Rating	25A
Mechanical Load	Front 2400Pa,back 2400Pa
Wind Resistance Class	Lv.17
Hailstone Test	25mm hailstone at the speed of 23m/s

### Package

Transportation	Container size	Quantity (pcs)	Quantity (per pallet)
Container	40' HQ	720	40
Platform Trailer	13m	800	40
Platform Trailer	17.5m	1120	40



Shandong ZKFN Solar Technology Co., Ltd.

Tel.: +86 400 6768 100 Web.: [www.zkfn.com](http://www.zkfn.com)

Add.: Factory 1 of XinShenglin,LvHaiHui Intelligent Manufacturing Industrial Park, Jining Economic Development Zone,Jining,Shandong,China

\*NOTE: ZKFN Solar reserves right to update the specification without notice. Please always obtain the most recent version of the datasheet.

202605\_V4.2.2\_EN